


## E2000 - Connectors and Adapters

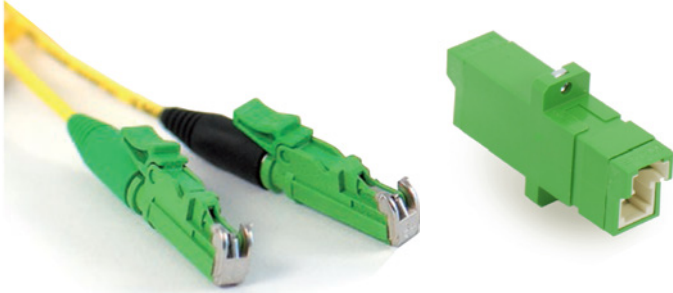

### Properties


- Comply with IEC standard IEC 61754-15
- Simplex and duplex styles
- Single-mode (PC/blue, APC/green) and multi-mode (grey)
- Can be assembled with cables of 0,6mm - 3,5 mm diameter
- One-piece design

### Specifications

Tuning :	In 60 °steps
Operating temperature °C :	-40 to +85
Flammability :	UL 94 V-0
Lifetime :	1000 connections
Tensile load	100 N

### Singlemode simplex/ duplex 9/125

- LCAPC-E2000APC
- LC-E2000APC
- E2000APC-E2000APC

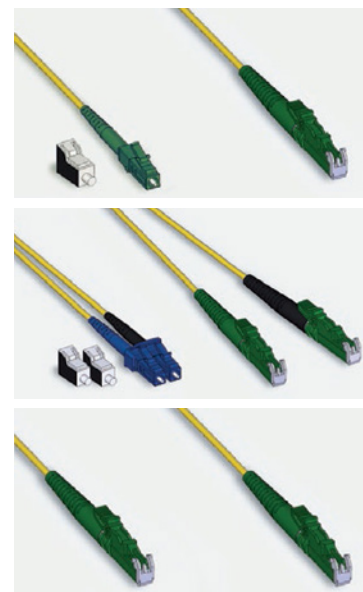

Single & Multi-mode Assembly Specifications	
Return loss (dB) MM	≥ 35
Return loss (dB) SM PC	≥ 50
Return loss (dB) SM APC	≥ 85
Return loss (dB) SM APC HE	≥ 85
Insertion loss MM typ. ≤ / 97% ≤	0.20 / 0.50
Insertion loss SM PC typ. ≤ / 97% ≤	0.20 / 0.45
Insertion loss SM APC typ. ≤ / 97% ≤	0.20 / 0.45
Insertion loss SM APC HE typ. ≤ / 97% ≤	0.12 / 0.25