


Pre-assembled FAN-OUTS

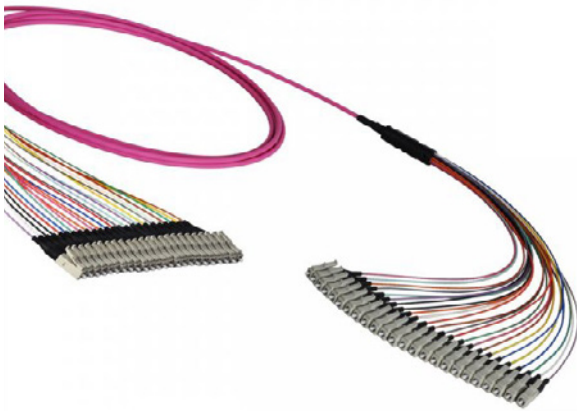

Description

Pre-assembled cable systems are actually furcation systems, furcating, for example, from a multi-fiber cable into individual single-fiber cables. Single-fiber connectors are pre-terminated on one or both ends of the individual fan-out cables, allowing for an easy and fast installation on site.

Applications

- The cable systems are suited for both indoor and outdoor installation.

Features

- Cables: ODF, indoor, Outdoor
- Fiber number: 4/6/8/12/16/24 fibers (ODF & indoor), 4/6/8/12/16/24/48 fibers (outdoor)
- Fiber type: single-mode (G.652.D, G.657.A1/A2/B3) or multi-mode (OM1-4)
- Connectors: LC, SC, FC, ST etc., PC/APC
- Individual fan-out cables: 0.9 mm or 1.7 mm in diameter, same or staggered cable length
- Connectors: LC, SC, FC, ST etc., PC/APC
- Cable length: any desired length
- Protection of the individual fan-out cables: choice between (1) tube protection and (2) tube protection + pulling aid and (3) plastic protection
- Packaging: choice between (1) carton drum + plastic bag and (2) carton drum + carton box and (3) carton box

Cable type	Fiber Type	Cable Ø	Drum Length
PRE-ASSEMBLED FAN-OUTS	G.652.D, G.657.A1/A2/B3 , OM1-4	0.9mm 1.7mm	-